


Control Joint with Removable Tape

Designed to relieve stress caused by expansion and contraction

Control joint used for EIFS / DEFS applications to relieve stress caused by expansion and contraction and control cracking in large areas of walls and ceilings. The removable tape creates a mask over the expansion slot during installation for a clean finish. Large perforations allow the base coat mixture to easily flow through and bond to the substrate. Recommended usage is for every 130-140 sq. ft. with no one side being longer than 15ft. Caulk all intersections, butt joints, ends, and corners at the time of installation.

Product Data & Ordering Information:

Product Code	Finish Thickness	Insulation Thickness	Perforated Flanges	Reveal Width	Reveal Depth	PCS/Box
CJV-16E	1/16"	All	1-1/8"	3/16"	7/16"	50
CJV-25E	1/4"	All	1-1/8"	3/16"	7/16"	35
CJV-38E	3/8"	All	1-1/8"	3/16"	7/16"	25

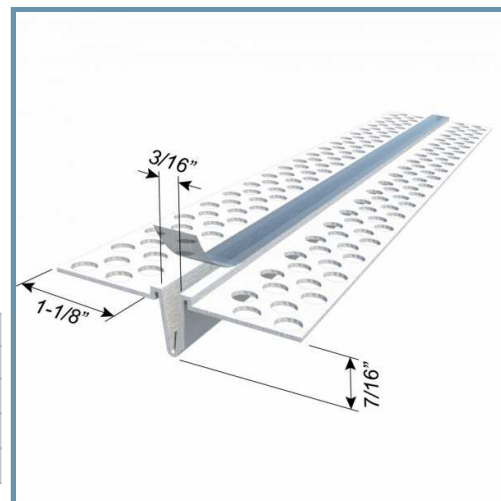

Code Approvals & Performance Standards

- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2273](#) Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies
- [ASTM E2486](#) Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2511](#) Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- [ASTM E2568](#) Standard Specification for PB Exterior Insulation and Finish Systems
- [SDS Vinyl Corp](#) PVC Compounds

- Size and quantity of penetrations in the flange vary per profile

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

