

Soffit Drip - Surface Mount

Designed for exterior soffits

Designed for surface-mount applications where a soffit edge reveal is combined with a drip edge in order to direct moisture away from the installation. Always use a rigid backing or blocking material behind surface mounted reveal. Caulk all intersections, butt joints, ends, and corners at the time of installation.

Product Data & Ordering Information:


Product Code	Board Thickness (A)	Reveal (B)	PCS/Box
SDR50-50	1/2"	1/2"	20

Code Approvals & Performance Standards

- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2273](#) Standard Test Method for Determining the Drainage Efficiency of Exterior Insulation and Finish Systems (EIFS) Clad Wall Assemblies
- [ASTM E2486](#) Standard Test Method for Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2511](#) Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- [ASTM E2568](#) Standard Specification for PB Exterior Insulation and Finish Systems
- [SDS Vinyl Corp](#) PVC Compounds

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

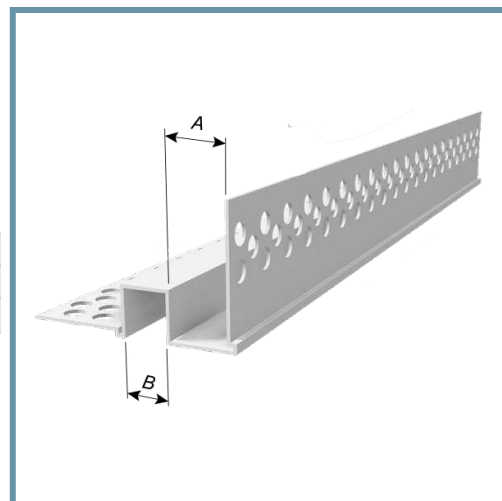

Made in white or these standard thru-body colors:



Contact ClarkDietrich for pricing and availability

